

geodyna® 960



The compact-size wheel balancer for wheels up to 70 kgs


Despite of its compact design the geodyna 960 features 2D SAPE where rim diameter and the distance rim/machine are entered automatically.

- VPM measuring system with patented virtual plane measurement technique
- Start of measuring run by closing of wheel guard, or pressing of START key
- In ALU modes (ALU 2P and ALU 3P) relocation of weight position inside the rim with the gauge arm
- Clamping of wheel on integrated flange with quick-clamping nut
- Gauge arm with patented weight clamp for optimum placement of adhesive weights
- Hidden weight mode (HSP)
- QuickBal function for reduced cycle times
- Weight tray with 8 weight compartments
- Motor drive with V-belt for constant rotational speed during measuring run
- Automatic braking of wheel after measurement
- Pedal-operated main shaft lock
- Matching mode
- Optional accessory: SCA-I universal clamping adaptor

geodyna® 960



The VPM measuring system with patented virtual plane measurement technique ensures most accurate balancing results.

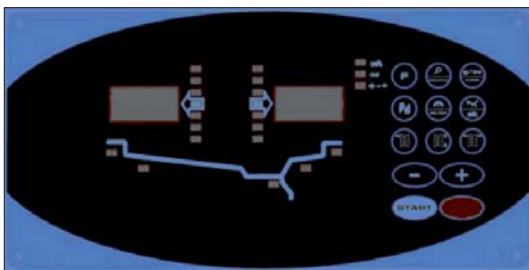

The conspicuous LE display presents pictorials which are easy to understand and hence very user friendly.



The wheel guard is included in delivery.



The gauge arm is equipped with a weight clamp which retains the wheel weight in the correct position for weight placement. Consequently the weight is fitted simply and accurately.

Technical data

Measuring speed (rpm)	< 100
Accuracy	1 g
Rim width	3 – 20"
Rim diameter	10 – 30"
Max. wheel width	500 mm
Max. wheel diameter	900 mm
Max. wheel weight	70 kg
Dimensions (W x D x H) with wheel guard open	1100 x 1050 x 1710 mm
Machine weight without adaptor	70 kg
Power supply	230 Volt, 1 ph / 50 – 60 Hz

Snap-on® Equipment

Deutschland

Snap-on Equipment GmbH · Konrad-Zuse-Straße 1 · 84579 Unterneukirchen
Tel: +49 (0) 8634 / 622-0 · Fax: +49 (0) 8634 / 5501 · www.snapon-equipment.de

Großbritannien

Snap-on Equipment Ltd. · 48 Sutton Park Avenue · Reading RG6 1AZ
Tel: +44 (0) 118/929-6811 · Fax: +44 (0) 118/966-4369 · www.snapon-equipment.co.uk

Frankreich

Snap-on Equipment France · ZA du Vert Galant · 15, rue de la Guivernone BP97175
ST Ouen L'Aumone · 95056 Cergy Pontoise CEDEX
Tel: +33 (0) 134/48 58-78 · Fax: +33 (0) 134/48 58-70 · www.snapon-equipment.fr

Italien

Snap-on Equipment s.r.l. · Via Prov. Carpi, 33 · 42015 Correggio (RE)
Tel: +39 0522/733-411 · Fax: +39 0522/733-410 · www.snapon-equipment.eu

EMEA-JA

Snap-on Equipment s.r.l. · Via Prov. Carpi, 33 · 42015 Correggio (RE)
Tel: +39 0522/733-411 · Fax: +39 0522/733-479 · www.snapon-equipment.eu

Part of the machines is illustrated with optional extras available at extra cost.
Technical modifications reserved.

Cod.: 9702 382 · 06/2011